


スプリングワッシャー
JIS規格サイズ表

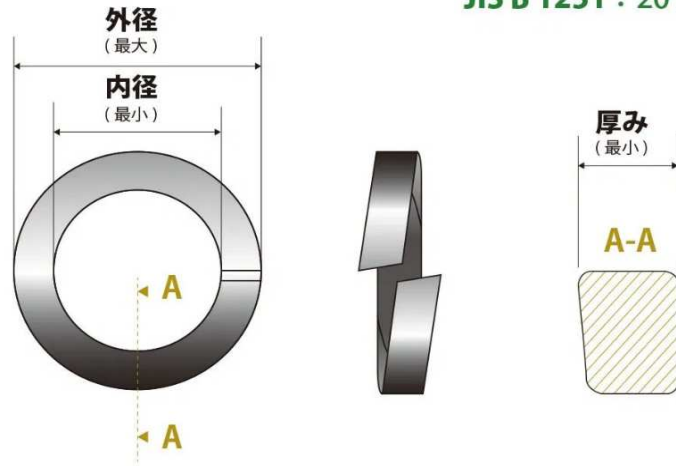

種類	2号 (一般用)			3号 (重荷重用)		
	基準 内径	基準 外径 (最大)	基準 厚み (最小)	基準 内径	基準 外径 (最大)	基準 厚み (最小)
M2	2.1	4.4	0.5			
M2.5	2.6	5.2	0.6			
M3	3.1	5.9	0.7			
M3.5	3.6	6.6	0.8			
M4	4.1	7.6	1			
M4.5	4.6	8.3	1.2			
M5	5.1	9.2	1.3			
M6	6.1	12.2	1.5	6.1	12.2	1.9
M7	7.1	13.4	1.6	7.1	13.4	2
M8	8.2	15.4	2	8.2	15.6	2.5
M10	10.2	18.4	2.5	10.2	18.8	3
M12	12.2	21.5	3	12.2	21.9	3.6
M14	14.2	24.5	3.5	14.2	24.7	4.2
M16	16.2	28	4	16.2	28.2	4.8
M18	18.2	31	4.6	18.2	31.4	5.4
M20	20.2	33.8	5.1	20.2	34.4	6
M22	22.5	37.7	5.6	22.5	38.3	6.8
M24	24.5	40.3	5.9	24.5	41.3	7.2
M27	27.5	45.3	6.8	27.5	46.7	8.3
M30	30.5	49.9	7.5			
M33	33.5	54.7	8.2			
M36	36.5	59.1	9			
M39	39.5	63.1	9.5			